



RM25

Dual 15 inch Coaxial Reference Monitor

reference
MONITOR



Overview

The RM25 is a bi-amplified, 3-way coaxial reference monitor that provides the accuracy, pristine imaging and precise transient response required of a studio monitor but with the directional control, power handling and output capability required in larger spaces. The RM25 is typically installed behind perforated cinema screens or acoustically transparent cloth, flush-mounted in walls, or mounted in free space in A/V studio control rooms. This makes it an ideal choice for cinemas, planetariums, museum exhibit spaces, A/V production suites, multimedia presentation facilities, and high end home theaters: any environment in which pristine audio quality is desired and a protective grille is not necessary.

Fulcrum Acoustic's **TQ™** processing is an integral part of the RM25 design. Sound, innovative acoustical design combined with state of the art digital processing leads to exceptional clarity and precise transient response, even at very high sound pressure levels. The required digital signal processing can be provided by one of many supported platforms.

The coaxial and low frequency transducers are mounted in independent, asymmetrical chambers designed to minimize standing waves. In addition, the internal volume and porting are optimized for extended low frequency response. This combination results in a highly articulate low mid transient response and surprisingly visceral low frequency extension. The absence of a grille and its supporting structures reduces reflections and diffraction, which contributes to the RM25's spacious, well defined image and open sound stage. Its shallow enclosure includes numerous M10 mounting points, while its rotatable 90° x 45° coaxial transducer supports either vertical or horizontal orientation.

Performance Specifications¹

Operating Mode

Bi-amplified w/ DSP

Operating Range²

27 Hz to 20 kHz

Nominal Beamwidth

90° x 45°

Transducers

LF: 15.0" ceramic magnet woofer, 4.0" voice coil
HF/LF: Coaxial 3.0" titanium diaphragm compression driver;
15.0" woofer, 3.0" voice coil; single neodymium magnet

Power Handling @ Nominal Impedance³

LF: 75 V / 700 W @ 8 Ω

HF/LF: 57 V / 400 W @ 8 Ω

Nominal Sensitivity @ Input Voltage⁴ (whole space)

LF: 95 dB @ 2.83 V

HF/LF: 104 dB @ 2.83 V

Nominal Maximum Continuous SPL

LF: 123 dB

HF/LF: 130 dB

Equalized Sensitivity @ Input Voltage⁵

96 dB @ 2.83 V

Equalized Maximum SPL⁶

126 dB

Recommended Power Amplifiers

LF: 700 W to 1400 W @ 8 Ω

HF/LF: 400 W to 800 W @ 8 Ω

Physical Specifications

Connections

(2) Neutrik NL4 Speakon

Pin 1+/-: LF

Pin 2+/-: HF/LF

Mounting / Suspension Points

(12) M10 eye bolt angle points, (2) M10 yoke points,

(1) M10 pull back point

Dimensions / Weight

See page 5

Finish


Black or white painted enclosure

Options


Terminal strip input, Custom color finish




Axial Sensitivity (dB SPL, 2.83 V @ 1 m)^{7,8}

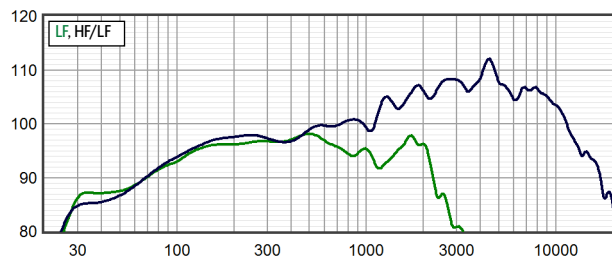


Horizontal Off Axis Response^{7,11}

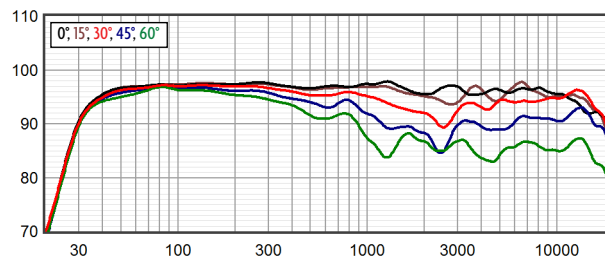


Axial Processed Response (dB)^{7,9}

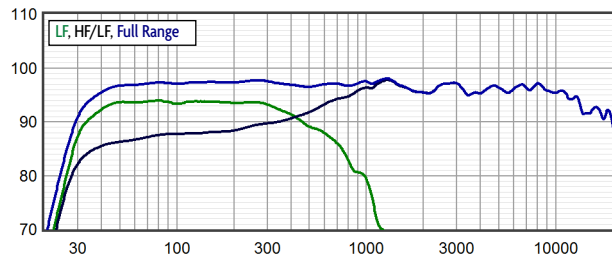


Vertical Off Axis Response^{7,11}

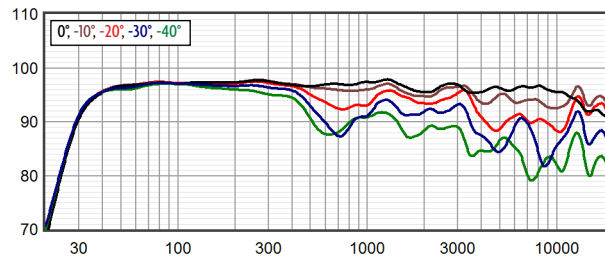


Axial Processed Phase Response (degrees)^{7,10}

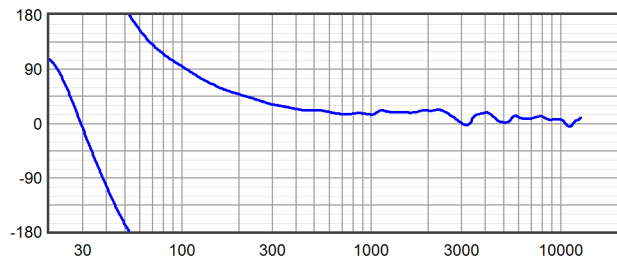


Beamwidth^{7,12}

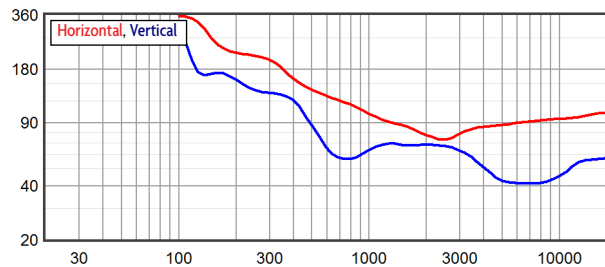

Impedance (ohms)

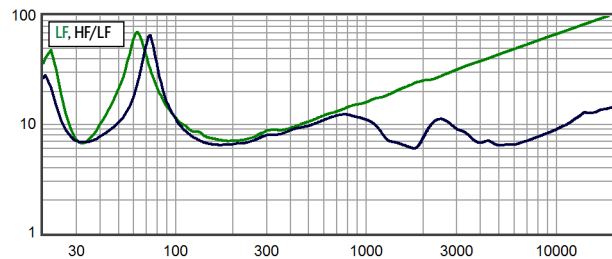


Directivity Index (dB)¹³

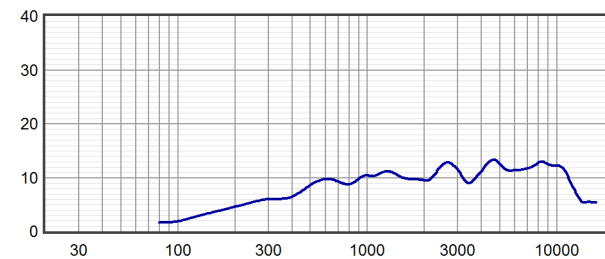




Horizontal Polar Response (30 dB Scale, 6 dB per Major Division)

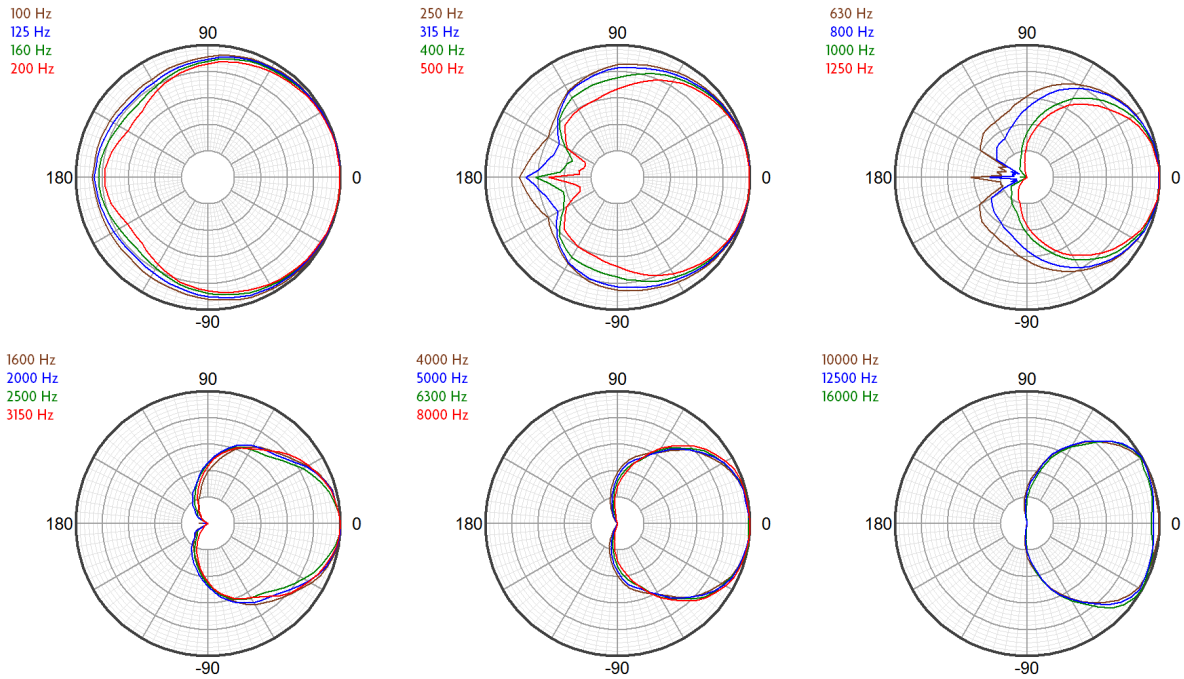

Vertical Polar Response (30 dB Scale, 6 dB per Major Division)

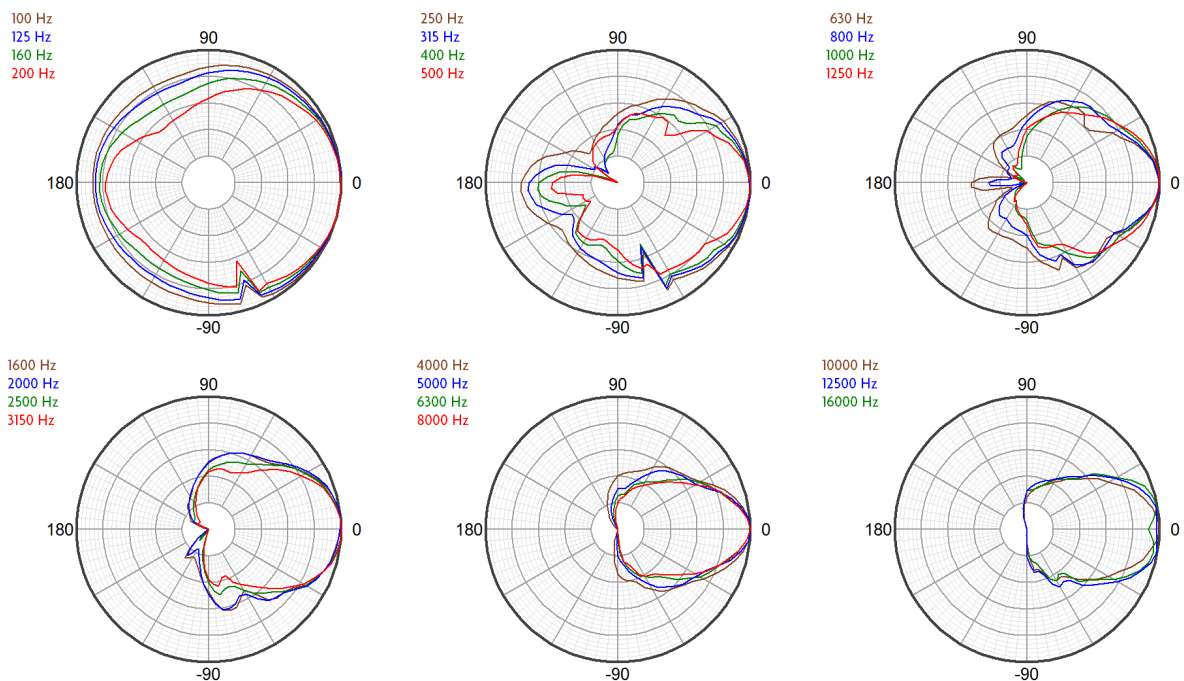



Technologies

The RM series represents a modern digital-signal-processing-aware update to the traditional horn-loaded coaxial monitor concept. The well-known benefits of the coaxial approach have been realized without the familiar shortcomings of historical designs. Fulcrum **Temporal Equalization™ (TQ™)** digital signal processing techniques provide precise transient response and accurate voicing, while ensuring smooth, seamless coverage through the crossover range. In fact, the coaxial transducers were designed from the ground up to take advantage of the unique capabilities of **TQ™**.


The coaxial transducer in the RM25 includes a 3 inch diaphragm compression driver. The large diaphragm area permits the

compression driver to operate at frequencies too low for smaller compression drivers to handle. This allows the high frequency horn to smooth the directional response of the low frequency section in the frequency range where the horn would otherwise cause shadowing. It also allows the compression driver to produce extreme sound pressure levels with an effortless sonic character.

The coaxial woofer's large radiating surface works in conjunction with the high frequency horn to improve directional control at the low frequency end of the horn's operating range, increasing directional control beyond what can be accomplished by the horn alone.

Connection Diagram

3-way, Bi-Amp

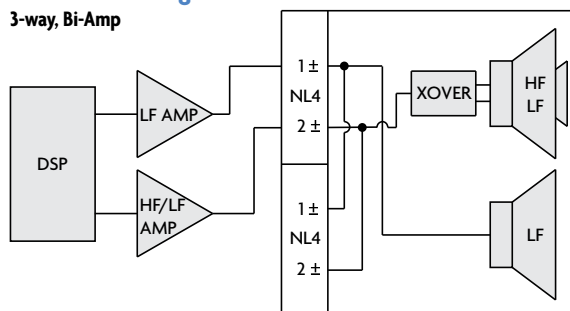

Mechanical Specification Drawings

2D and 3D DXF dimensional drawings are available for download at www.fulcrum-acoustic.com/support.

Notes

- ¹ **Performance Specifications** All acoustic specifications rounded to nearest whole number. External DSP with Fulcrum Acoustic-provided settings is required to achieve the specified performance.
- ² **Operating Range** The frequency range within which the processed response is within 10 dB of the average.
- ³ **Power Handling** Based on the AES power handling of the transducers.
- ⁴ **Nominal Sensitivity** The 1-meter-referenced SPL produced by a 1 watt band limited pink noise signal, with no processing applied.
- ⁵ **Equalized Sensitivity** The 1-meter-referenced SPL produced when an EIA-426-B signal is applied to an equalized loudspeaker system, at a level which produces a total power of 1 watt, in sum, to the loudspeaker subsections.
- ⁶ **Equalized Maximum SPL** The 1-meter-referenced SPL produced when an EIA-426-B signal is applied to an equalized loudspeaker system, at a level which drives at least one subsection to its rated power.
- ⁷ **Resolution** All response graphs are subjected to 1/6 octave cepstral smoothing with a gaussian weighting function.
- ⁸ **Axial Sensitivity** The SPL plotted against frequency for a 1 watt swept sine wave, referenced to 1 m with no signal processing.
- ⁹ **Axial Processed Response** The axial magnitude response with recommended signal processing applied.
- ¹⁰ **Axial Processed Phase Response** The axial phase response with recommended signal processing applied, and latency removed.
- ¹¹ **Horizontal / Vertical Off Axis Responses** The magnitude response at various angles off axis, with recommended signal processing applied.
- ¹² **Beamwidth** The angle between the -6 dB points in a loudspeaker's polar response.
- ¹³ **Directivity Index (Di)** The ratio of the on-axis sound pressure squared to the spherical average of the sound pressure squared at a particular frequency expressed in dB. To convert the directivity index to directivity factor (Q) use the formula $10^{Di/10}$.




product specification


Notes:

1. Net Weight = Approx. 111.0 lb / 50.3 kg
2. Ship Weight = Approx. 126.0 lb / 57.2 kg
3. Symbol = M10 eye bolt angle point
4. Symbol = M10 nut plate
5. Symbol = CoG

REVISIONS		
REV	DESCRIPTION	APPR / DATE
1	NEW ISSUE	RAF 6/24/10
2	ADD HORN/WOOFER DIMS	RAF 4/26/11
3	ADD SHIPPING WEIGHT	RAF 12/12/11

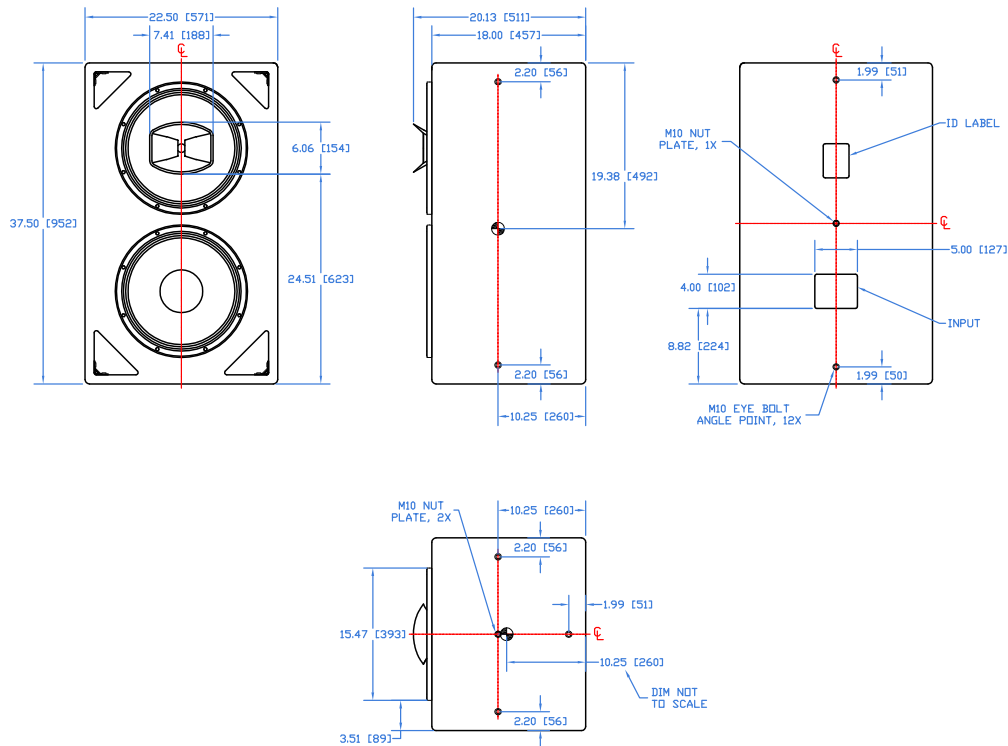

THIRD ANGLE PROJECTION



THIS DRAWING IS THE PROPERTY OF FULCRUM ACOUSTIC, AND SHALL NOT BE COPIED, REPRODUCED, OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN AUTHORIZATION. DO NOT SCALE DRAWING.

UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN INCHES

TOLERANCE IN INCHES
.XX±.015 .XXX±.005
FRACTIONS ±1/32
ANGLES ±1/2°

(X.XX) = REF DIMS NO TOLERANCE IMPLIED

TSC = THEORETICAL SHARP CORNER

DIMENSIONS ACROSS CENTERLINES TO BE SYMMETRICAL

STATUS RELEASED

APPROVALS DATE

DRAWN: RAF 6/24/10

CHECKED: DWG 6/24/10

DES ENG:

MFG ENG:



FULCRUM ACOUSTIC, LLC
670 LINWOOD AVE, LINWOOD, MA 01525 USA

TITLE: Mechanical Spec, RM25

B SHEET 1 OF 1 SCALE: 1:20

DWG. NO. 820-100-034 REV 3

Drawing is reduced. Do not scale.